

Spot Merchandiser

Engineered for store ambient conditions not to exceed
75 degrees and 50% relative humidity.



amtekco


❖ A Wasserstrom Company

Manufacturers of Quality Products for the Food Marketing Industry

1205 Refugee Road • Columbus, Ohio 43207
800-336-4677 or 614-228-6590 • Fax: 614-737-8017
www.amtekco.com

Spot Merchandiser

Model Number	CASE LENGTH	REFRIGERATION CAPACITY (BTUH)	ELECTRICAL			
			REMOTE		SELF-CONTAINED	
			VOLTAGE	AMPS	AMPS	PLUG
ASM-36	36"	2,800	120V	0.5A	13.3A	NEMA 5-20P
ASM-48	48"	3,370	120V	0.5A	11.75A	NEMA 5-15P

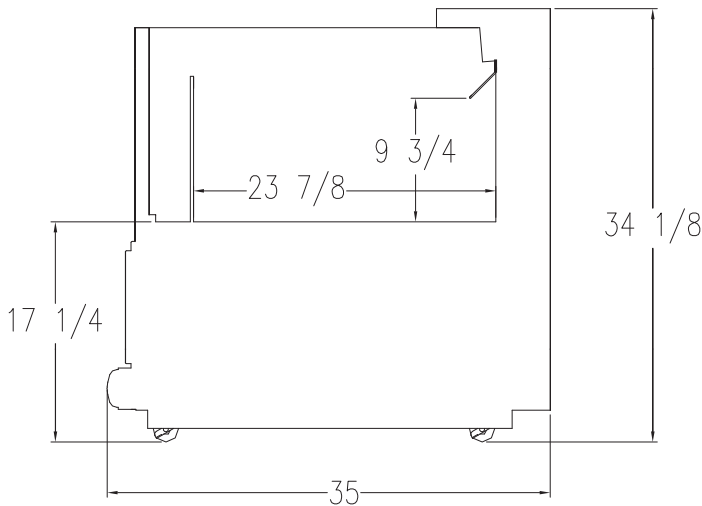

Standard features:

- Shopping cart protection @ 3 sides
- Flow-over air curtain refrigeration
- Clear tempered thermal glass sides and front
- 100% mobile
- Cord and plug provided, NEMA 5-20P
- Flip down grill provided with interchangeable filter
- Durable powder coated finish interior & exterior
- Electronic programmable ECM fan motors
- Heavy-duty swivel caster, 2 locking
- Engineered to hold products at 35 – 41 degrees
- Conforms to UL 471, NSF-7 and CAN/CSA C22.2

Self-contained option:

- Copeland condensing unit
- Cool air intake through front
- Warm air discharge at back to prevent re-circulation issues
- Sporlan internal equalized expansion valve
- Dixell electronic controller features automatic defrost
- NEMA plug and cord provided
- Electric condensate evaporator

Remote option:

- Sporlan internal equalized expansion valve per refr. type
- Optional set up for third-party control probes
- Optional Glycol refrigeration set up
- NSF-approved leveler feet in lieu of casters

Other options available:

- Stainless steel construction interior and exterior
- Display risers to minimize capacity while providing full display
- Custom powder coated finish, color specified by customer
- Private label branding with vinyl applied graphics
- Liquid line ball valve

Contact your Amtekco sales representative: 1-800-336-4677

amtekco

A Wasserstrom Company

Manufacturers of Quality Products for the Food Marketing Industry

Equipment That Means Business