




## POLY TOP WORKTABLES PF2-SERIES— OPEN BASE BONING AND TRIMING TABLE W/ S/S BACKSPLASH

PROJECT#: \_\_\_\_\_

ITEM# \_\_\_\_\_

MODEL# \_\_\_\_\_

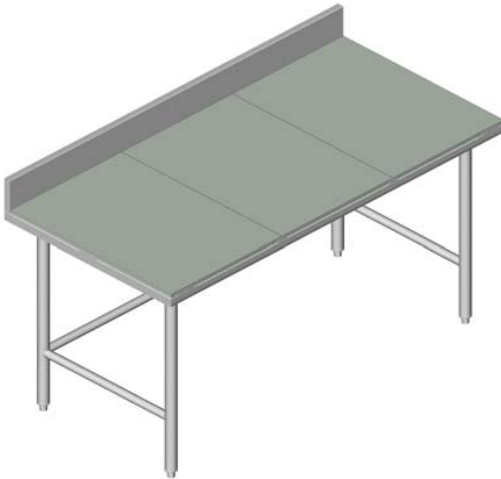

STANDARD - SPF2 - SERIES				
MODEL NUMBER	QTY	WIDTH (INCHES)	LENGTH (INCHES)	SHIPPING WEIGHT (LBS)
SPF2-2424		24	24	58
SPF2-2430		24	30	65
SPF2-2436		24	36	73
SPF2-2442		24	42	79
SPF2-2448		24	48	86
SPF2-2454		24	54	92
SPF2-2460		24	60	104
SPF2-2466		24	66	113
SPF2-2472		24	72	123
SPF2-2478		24	78	130
SPF2-2484		24	84	138
SPF2-2490		24	90	147
SPF2-2496		24	96	153
SPF2-24102		24	102	160
SPF2-24108		24	108	169
SPF2-24114		24	114	177
SPF2-24120		24	120	189

MODEL NUMBER	QTY	WIDTH (INCHES)	LENGTH (INCHES)	SHIPPING WEIGHT (LBS)
SPF2-3024		30	24	64
SPF2-3030		30	30	71
SPF2-3036		30	36	79
SPF2-3042		30	42	85
SPF2-3048		30	48	92
SPF2-3054		30	54	98
SPF2-3060		30	60	110
SPF2-3066		30	66	119
SPF2-3072		30	72	129
SPF2-3078		30	78	136
SPF2-3084		30	84	144
SPF2-3090		30	90	153
SPF2-3096		30	96	159
SPF2-30102		30	102	166
SPF2-30108		30	108	175
SPF2-30114		30	114	183
SPF2-30120		30	120	195

### SPECIFICATIONS:

**STANDARD— Series: 300 Series Stainless**

**FRAME:** 16 GA.  
300 Series Stainless

**POLY TOP:** Foam Core Polyethylene  
Cutting Surface

**CROSS BRACING:** 1" Diameter  
Tubular Stainless Steel

**LEGS:** 1 5/8" Diameter  
Tubular Stainless Steel

**REINFORCING:** Formed Channel Fastened to  
Top. Legs Welded to Channel

### CONSTRUCTION:

- ◆ All Table Connection Points Fully Welded for Maximum Rigidity and Long Life
- ◆ S/S Adjustable Bullet Feet
- ◆ Sound Deadening Between Top and Reinforcing Channel
- ◆ S/S Cross Bracing Welded to Legs
- ◆ Polyethylene Cutting Surface Held in Place on Top of Table by Stainless Steel Tabs Integrally Formed In To Frame
- ◆ Table is Polished to #3 Finish
- ◆ Working Height 35" to 36 1/4"
- ◆ Tables Above 78" Will Require (3) Sets of Legs

